


Heavy duty HD bracket camera; 150°; WDR; IR leds; Mic; Heater (NTSC)

Art. Nr: CAM-HD-Q5HD

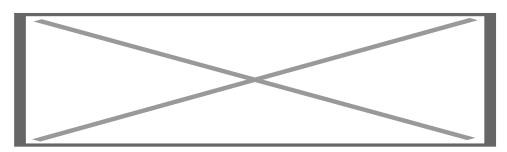

DESCRIPTION

Heavy duty HD camera; Front/Rear/Side; 1280x960 (NTSC)

Features

- 1/3.2" SONY CMOS HD Color Sensor
- Vibration & impact resistant housing
- All view direction applicable (via rotary key)
- IP69K Waterproof rating
- 150 degrees lens (Wide field of view)
- WDR (Wide Dynamic Range)
- High End Night View (0.0Lux) with 8* LEDs
- Built-in microphone located on the back to minimize the wind noise
- Easy switching NORMAL or MIRROR View
- Voltage range (12V-32V)
- Extreme Temp. Durability

Operating: -30°C ~ 60°C

Storing Temp. : -40°C ~ 80°C

- 4-pins Mini connector to RCA
- Front/Rear/Side mounting
- CE-mark
- FCC-mark
- 2 Year warranty & Support

EXCLUSIVE CAMERA FEATURES

High End 1/3.2" SONY CMOS HD Color Sensor with 1280*960 resolution

SONY

Heater

The camera is equipped with heater function.

- -Auto heater ON/OFF at 0 degrees
- -Warming inside of the camera for working normal



IR leds


The camera is equipped with 8* IR nightvision leds.

- -Auto ON/OFF by a brightness detecting sensor
- -Progreesive Brightness adjustment
- -Wider & Longer illuminating range by a patented designed front glass




Mirror & Unmirror option

The camera is equipped with the magnet for the mirror image view as a factory default. So, remove the magnet for the Normal Image View.

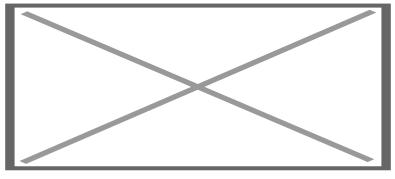


Easy fix

Easy installation via the included bracket




Sunviser

Included adjustabel sunvisor



Metal screw lock

Water- & shock proof 4-pins mini din screw lock connector.

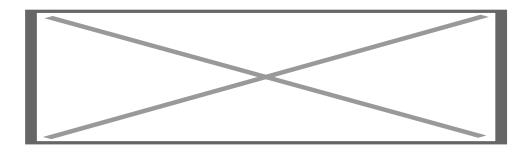

Ignition proof (+15)

It is possible to connect the powersupply to an ignition feed (+15), because we use the highest quality camera.


In this way you are able to watch the camera also in DRIVE gear or via manual selection.

NOTES

- We recommend that the installation will be performed by a qualified specialist
- Check also the other tabs for "Compatibility" "Package contents" "Product specifications"

LEGAL NOTICE

Please check before purchase if it is aloud to install this camera and it wont affect your MOT.

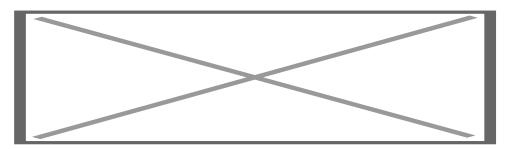

COMPATIBILITY

Universal use
Only for rear installation

NOTES

- RCA output = male
- CVBS signal is NTSC