

## **Multimedia Video interface Infinity RGB navigation systems (FX)**

**Art. Nr:** IF-INFIN-FX

---

### **General**

The NavInc interfaces allow for connecting video sources to the original navigation system of Infinity.

The interface ensures that an input is created on the original navigation system, on which various external video sources can be connected (e.g. DVD player, DVB-T TV, iPod, reversing camera, external navigation systems, etc.). The images will be displayed on the navigation screen. The audio of the video sources must be submitted via an AUX input or FM modulator.

If multiple audio / video sources are connected to the audio input you can switch to audio via the "Audio Select" option.

It is possible to switch between the different video sources via the included button and/or remote control.

The interface is equipped with external connections:

- Camera input; for the connection of reversing camera with automatic activation
- Video output; for the sending the video images to head rest monitors or roof monitor.


Besides the interface creates an audio select +12V signal on every video input. This means:

If Video input (V1) is selected, then on the audio select cable of V1 will be a +12V signal. The audio select cable of V1 needs to be connected with the DVD player or DVB-T tuner. This in order to switch on the devices when Video input 1 (V1) is selected. As Video input 2 (V2) is selected, the source on V1 will be switched off and the source on V2 will be switched on. This enables also to switch the audio.



## Features

- RGB input (Connecting external navigation system)
- 2x Audio/Video input (connect video sources, TV / DVD / iPod)
- Camera input (connecting reversing camera)
- Video output (connect headrest screens)
- NTSC support
- Audio select output (audio/video selection port)
- Image retention while driving
- CE-approved

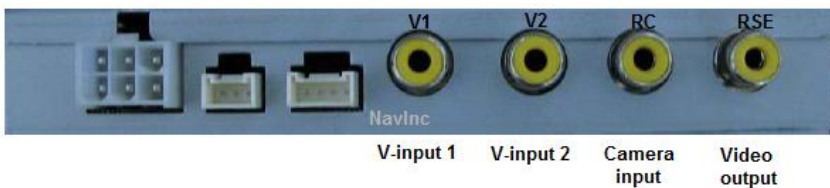

## The following is provided in the set:

- NavInc AV-Interface IF-INFIN-FX
- Cable set
- Installation- and user manual
- Warranty
- Invoice

**Additional information:**

- Check at the tab “compatibility” on top of this page if your radio or navigation system is suitable for this product.
- The connected video sources must support NTSC video signals.
- Audio of the connected video source must be linked to the AUX input of car, FM modulator, USB or iPod interface.
- No constant voltage needed (+30) therefore the interface is much more stable.
- Mute function for the not used video inputs.
- Use of a metal casing and new components (not Chinese or remanufactured components).
- Plug and play cable kit

**Product specifications**

Voltage: 12V – 24V DC

Voltage-operating capacity: 8 – 18V DC

Standby current: 0 mA

Operating current: 5 Watt max.

Power input: 12V

Temperature range: - 30°C up to + 80°C

Weight: 250grs

Dimensions(W x H x D): 130 x 20 x 102mm

**Legal information:**

The driver of the vehicle should not be inferred from the motion images. In many countries, watching movies while driving is prohibited. Therefore we accept no responsibility for material or personal injuries, directly or indirectly, due to installation of the interface modules.

**Interface and Software basic information:**

The NavInc interfaces are no navigation systems or screens to replace the navigation system. The NavInc interfaces enable the possibilities to connect different Audio/Video sources to the navigation system.

Manufacturers create adjusted software and hardware versions, options and enhancements which ensures that the compatibility of the products cannot be guaranteed 100%. Compatibility lists are based on customer feedback and experiences and will constantly be updated for optimal customer support.

## **Compatible for the following models of Infinity:**

### **Infinity**

EX35	2008-2010
FX35	2003-2005
FX35	2006-2008
FX35	2008-2010
FX45	2003-2005
FX45	2006-2008
FX50	2008-2010
G35	2006-2007
G35	2007-2010
G37	2007-2010
I35	2001-2004
QX56	2004-2007
QX56	2008-2010

### **Remarks:**

- Only in combination with OEM RGB navigation system with 7" monitor
- Only suitable for navigation systems with 24-pins monitor cable behind the unit
- Installation also possible in combination with original TV tuner
- AUX-output of the interface should be connected with an AUX interface or the AUX input of the car
- Installation also possible in combination with original reversing camera
- Also possible to use the interface stand alone for reversing and/or forward driving camera function
- Automatic switching to camera on navigation level
- Installation of the interface is behind the navigation unit

### **Image of suitable navigation systems:**

#### **EX35 2008 - 2010**



**FX35 / FX45 2003 - 2005**



**FX35 / FX45 2006 - 2008**



**FX50 2008 - 2010**



**G35 2005 - 2007**



**G37 2007 - 2010**



**I35 2001 - 2004**





### QX56 2004 - 2007



### QX56 2008 - 2010

