

NAVcam

heavy duty cameras



DESCRIPTION

Heavy duty mini HD camera substr/top mounting camera; 1280x720; IP69K (NTSC)

Features

- 1.2M SONY CMOS HD Color Sensor
- Vibration & impact resistant housing
- IP69K Waterproof rating
- 150 degrees lens
- WDR (Wide Dynamic Range)
- High End Night View (0.01Lux) without LEDs
- Anti-glare & ghost
- Voltage range (10V-24V)
- Extreme Temp. Durability
 - Operating: -30°C ~ 70°C
 - Storing Temp. : -40°C ~ 80°C
- 4-pins Mini connector to RCA
- Parking guide lines wire (ON / OFF)
- Substructure (vertical) & top (horizontal) mounting wire
- CE-mark
- FCC-mark
- 2 Year warranty & Support

EXCLUSIVE CAMERA FEATURES

SONY CCD

High End 2M SONY CMOS FHD Color Sensor with 1280x720 resolution


SONY

Parking Guide line

Parking guide line ON/OFF wire

Horizontal/Vertical mounting

Horizontal or vertical mounting wire

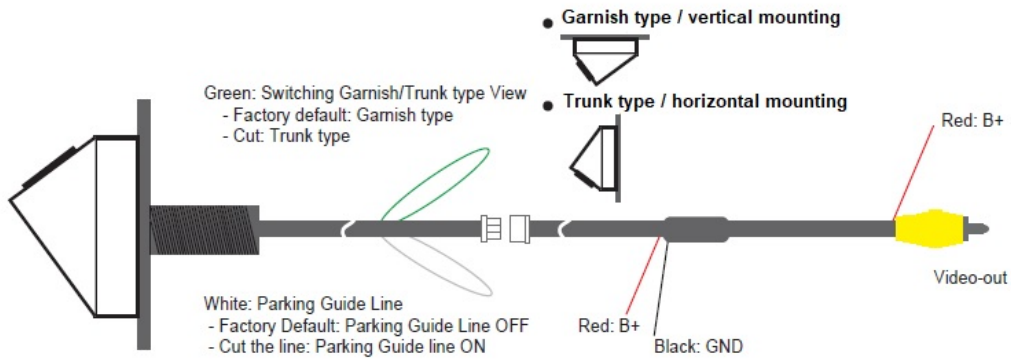

Ignition Power proof (+15)

It is possible to connect the powersupply to an ignition feed (+15), because we use the highest quality camera.

In this way you are able to watch the camera also in DRIVE gear or via manual selection.

NOTES

- We recommend that the installation will be performed by a qualified specialist
- Check also the other tabs for "Compatibility" - "Package contents" - "Product specifications"

LEGAL NOTICE

Please check before purchase if it is aloud to install this camera and it wont affect your MOT.

NAVcam
heavy duty cameras

COMPATIBILITY

Universal use
Only for rear installation

NOTES

-
- RCA output = male
 - AHD signal is NTSC